
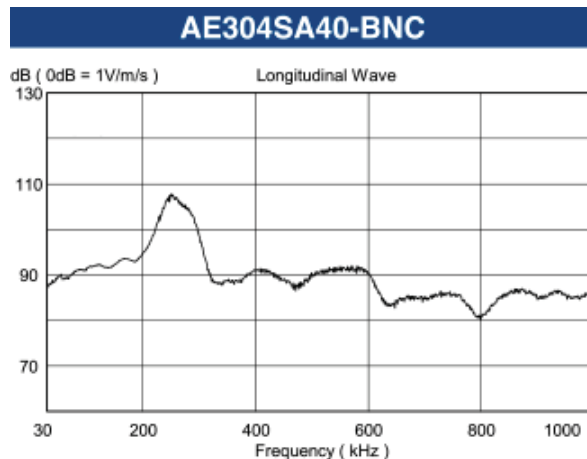
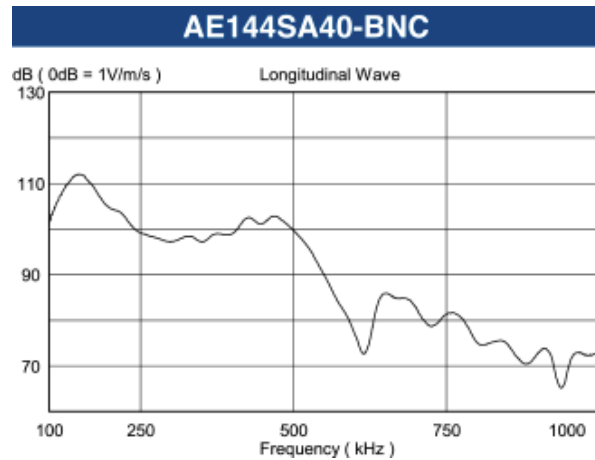
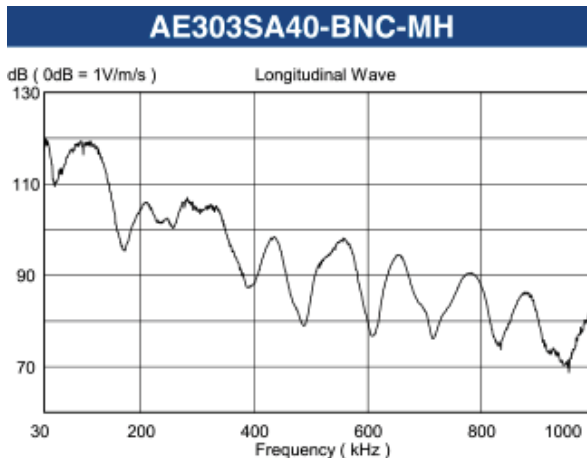


AE传感器

放大器内置AE传感器和其他

放大器内置AE传感器和其他

型号	共振频率 kHz	灵敏度 dB (0dB=1V/m/s)	使用温度范围 °C	构造	质量 gm	驱动电源
AE303SA40-BNC-MH (※)	30±20%	120±3	-20 ~ +80	安装面绝缘	157	28V, 50Ω
AE503SA40-BNC	50±20%	121±3	-20 ~ +80	安装面绝缘	67	28V, 50Ω
AE144SA40-BNC	140±20%	112±3	-20 ~ +80	安装面绝缘	56	28V, 50Ω
AE304SA40-BNC	300±20%	109±3	-20 ~ +80	安装面绝缘	61	28V, 50Ω

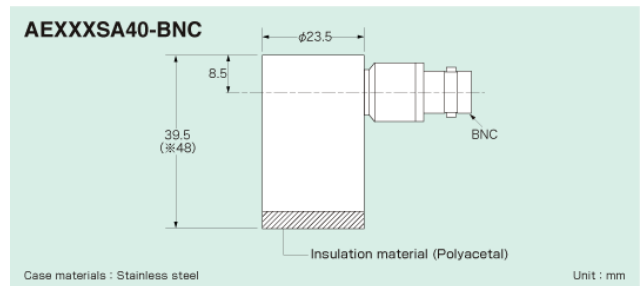

参考传感器

型号	频率范围 kHz	灵敏度 ※ dB (0dB=1V/m/s)	使用温度范围 ℃	特点	质量 gm
REF-VL	50 ~ 600±6dB	57±3 (※1)	-20 ~ +80	低频宽带	450
REF10M	~ 10MHz	34±5 (※2)	-20 ~ +80	宽带	155

※ 1: 灵敏度检测值包括1m的噪声电缆的容值 (90pF)

※ 2: 灵敏度检测值包括0.5m的噪声电缆的容值 (45pF)

